

m

tö

SHS | Le "U2• ÑQ7±&1 5"ö of" Đ

Electric screw drive

Independent electric screw drive brings you both plasticization and energy efficiency.

Pressure hold valve


With the advanced pressure hold technology, the system makes the plasticization and pressure hold at the same time therefore has a better cycle time for production.

Reliable clamping

PET

Special design for PET preform mold, which ensure the fast clamping movement and uniformly forced of the mold.

Proportional valve control

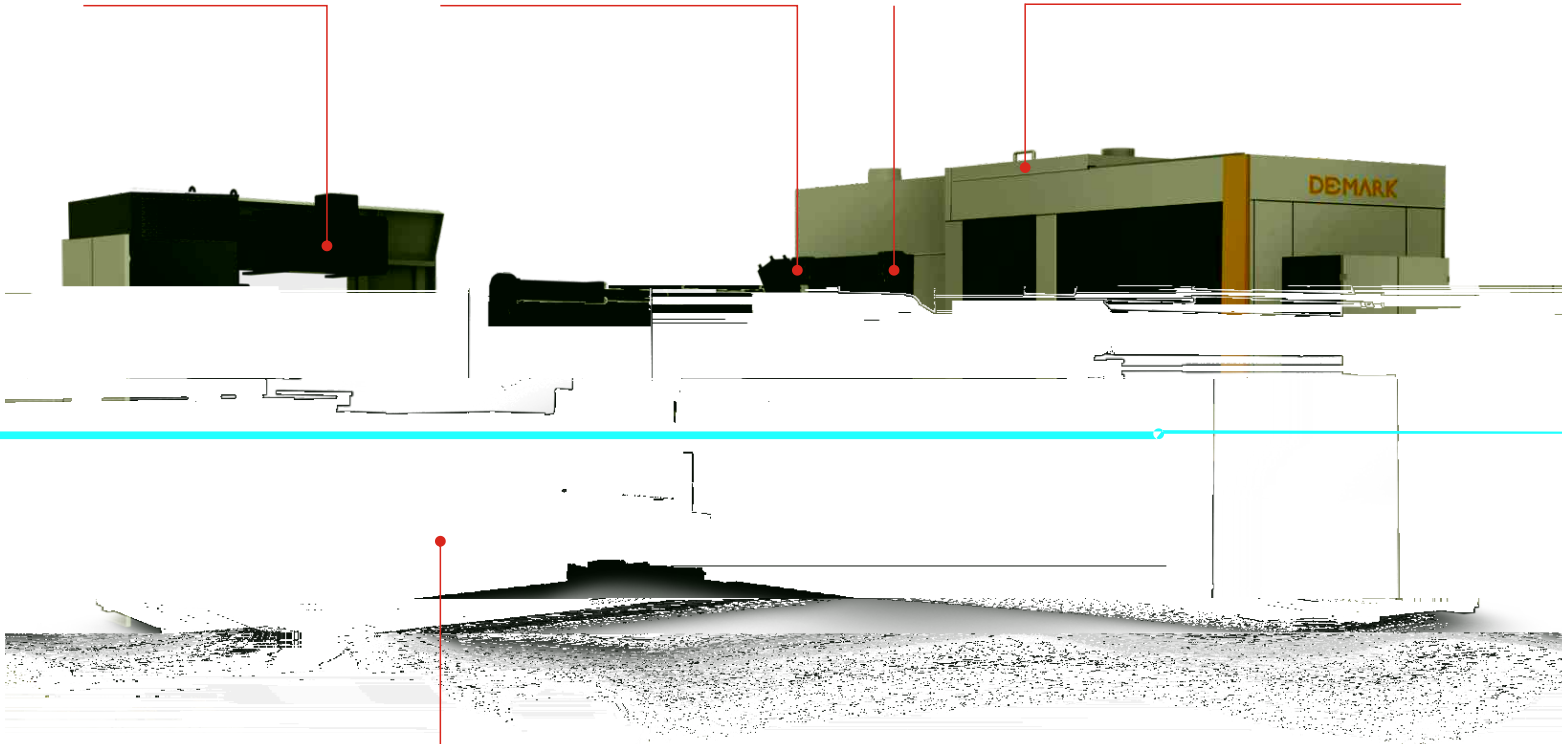


g, R-Ö o |P y QwÉ I u Öwö

Servo motor drive hydraulic system

The hydraulic system was driven by a servo motor which ensure the lower energy consumption and sufficient hydraulic power supply.

1 0 10 4 @ Q p r
Ser

西门子控制系统 SIEMENS control system

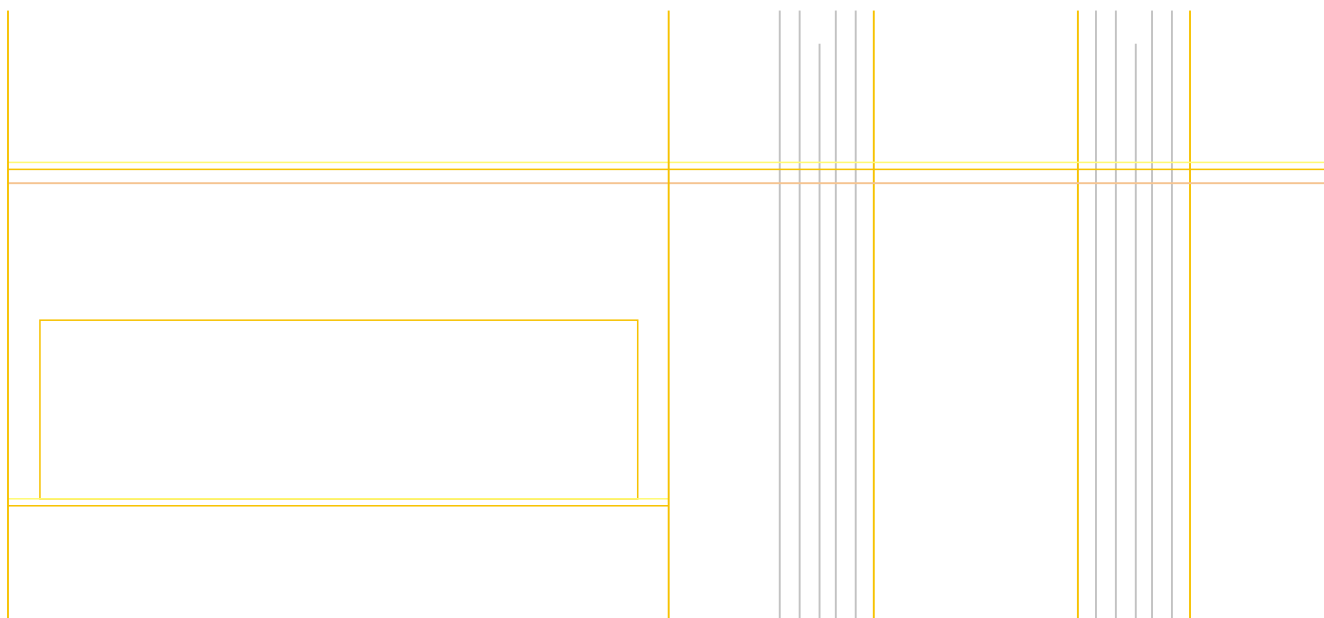

MODEL		ECO260/2000	ECO260/2500	ECO350
	L/D	25	25	25
	mm	80	90	90
PET)	g	2000	2500	2500
PET)	g/s	80	110	110
	T	260	260	260
	mm	540	540	540
/	mm	200-580	200-580	200-580
(x)	mm	570x570	570x570	570x570
	mm	150	150	150
	T	8	8	8
	pcs	1	1	1
	pcs	1	1	1
	N	1	1	1
	KW	1	1	1
	KW	1	1	1
	h	1	1	1
	h	1	1	1
(x x				
	supply (3-phase AC)			
	Chilling Water			
	mm	100	100	100
	mm	25	25	25
	mm	0.3	0.3	0.3
	mm	120	120	120
	mm	0.7-0.9	0.7-0.9	0.7-0.9
	mm	800	800	800
	mm	400	400	400
	mm	860x160x240	880x170x250	1020x210x250
	mm	14	17	18

